

BOX HEADER 2.54mm





BOX HEADER 2.54mm SMT/STR/RA TYPE

SPECIFICATION



Current Rate: 3 AMP
 Insulation Resistance: 5000M Ω Min.
 Contact Resistance: 10m Ω Max.
 Dielectric Voltage: 100V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL

Insulator: Polyester, UL 94V-0
 ◎Standard: P.B.T SMT: Nylon 6T
 Contact Pin: Brass

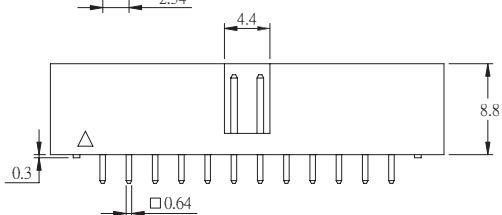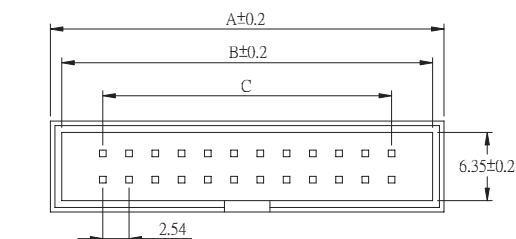


Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

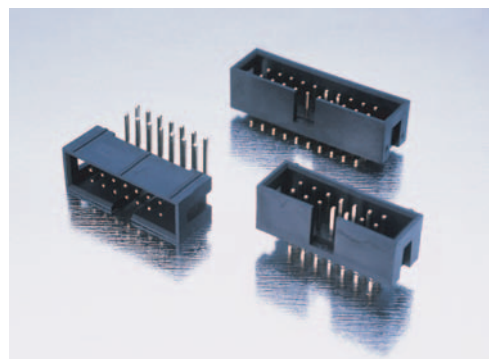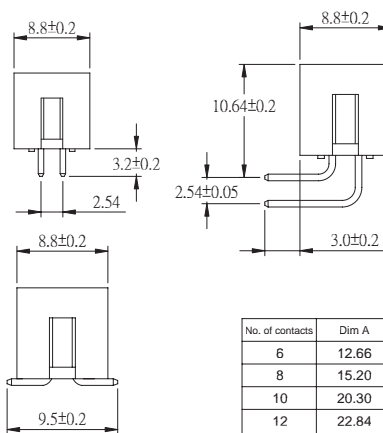

No. of contacts	Dim A	Dim B	Dim C
6	12.66	10.26	5.08
8	15.20	12.80	7.62
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.85
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.80	48.58	40.64
40	58.40	56.20	48.26
44	63.48	67.28	53.34
50	71.10	68.90	60.96
56	78.72	76.52	68.58
60	83.80	81.60	73.66
64	88.88	86.68	78.74

ORDER INFORMATION

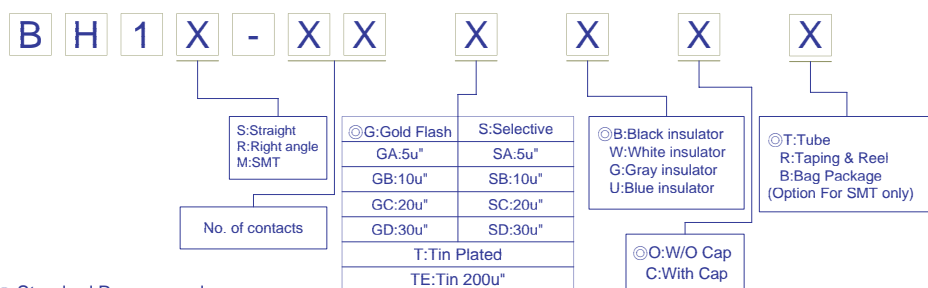

◎: Standard Recommend