



BOX HEADER 1.27x1.27mm SMT/RIGHT ANGLE/STRAIGHT TYPE FOR IDC

SPECIFICATION

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to + 105°C


MATERIAL

Insulator:Polyester,UL 94V-0
 ◎ Standard:Nylon 6T
 Contact Pin:Brass
 Finish:Tin, Gold Plated
 ◎Standard:Gold Flash all over

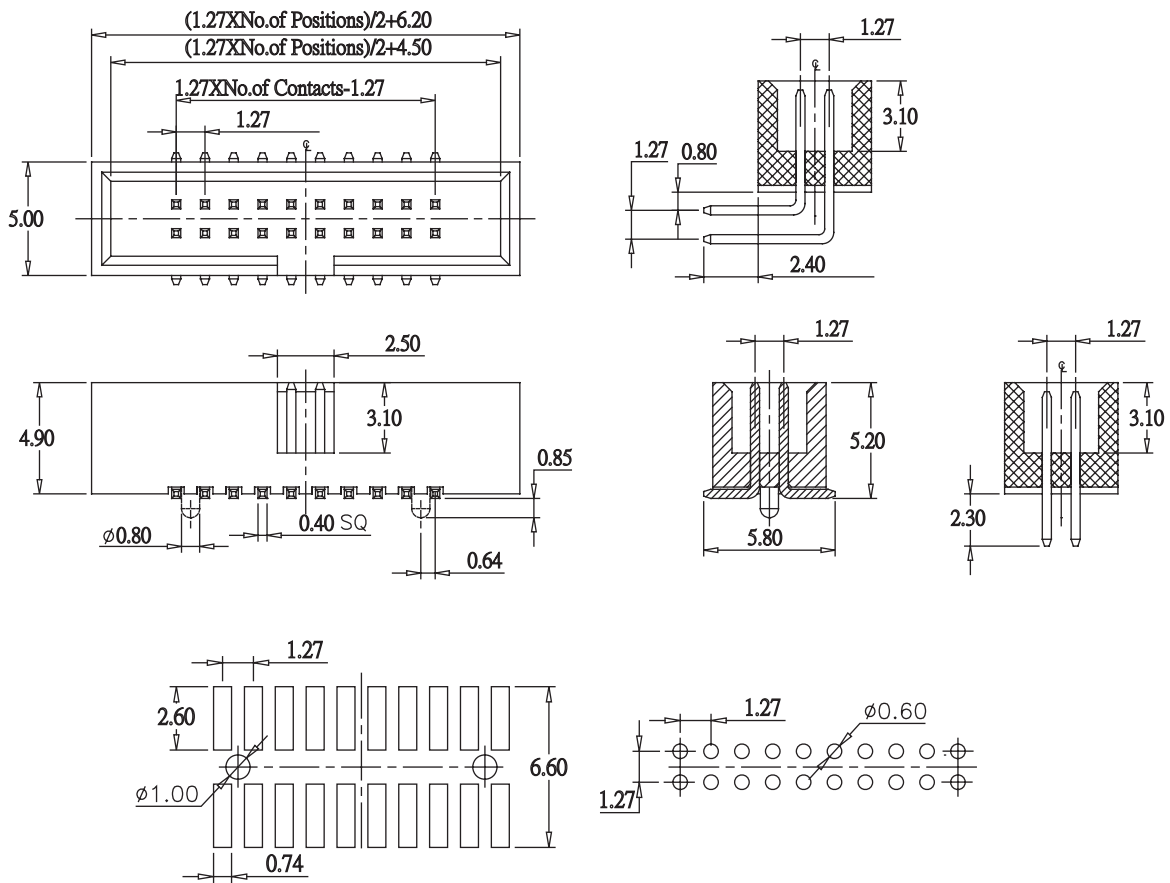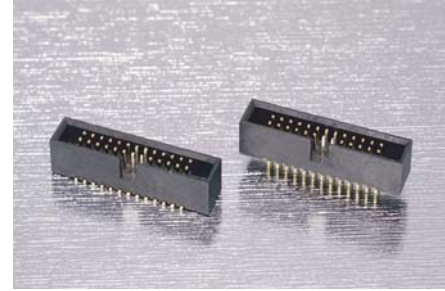

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

ORDER INFORMATION

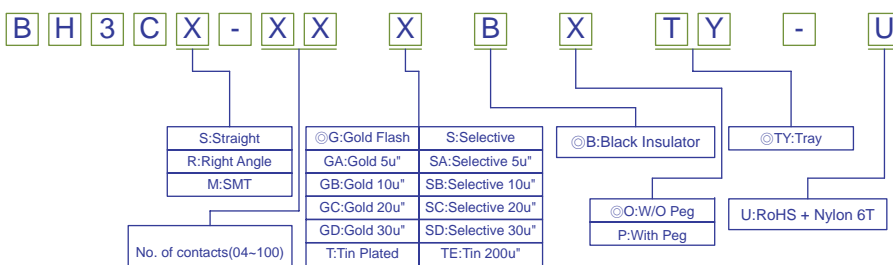

◎:Standard Recommend

