

# I DC SOCKET





## IDC SOCKET 1.27x2.54mm

### SPECIFICATION

Current Rate:0.5 AMP  
 Insulation Resistance:500MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric voltage:500V AC for one minute  
 Operation Temperature:-40 °C to + 65 °C

### MATERIAL


Insulator:Polyester,UL 94V-0  
 ◎ Standard:P.B.T  
 Contact Pin:Brass

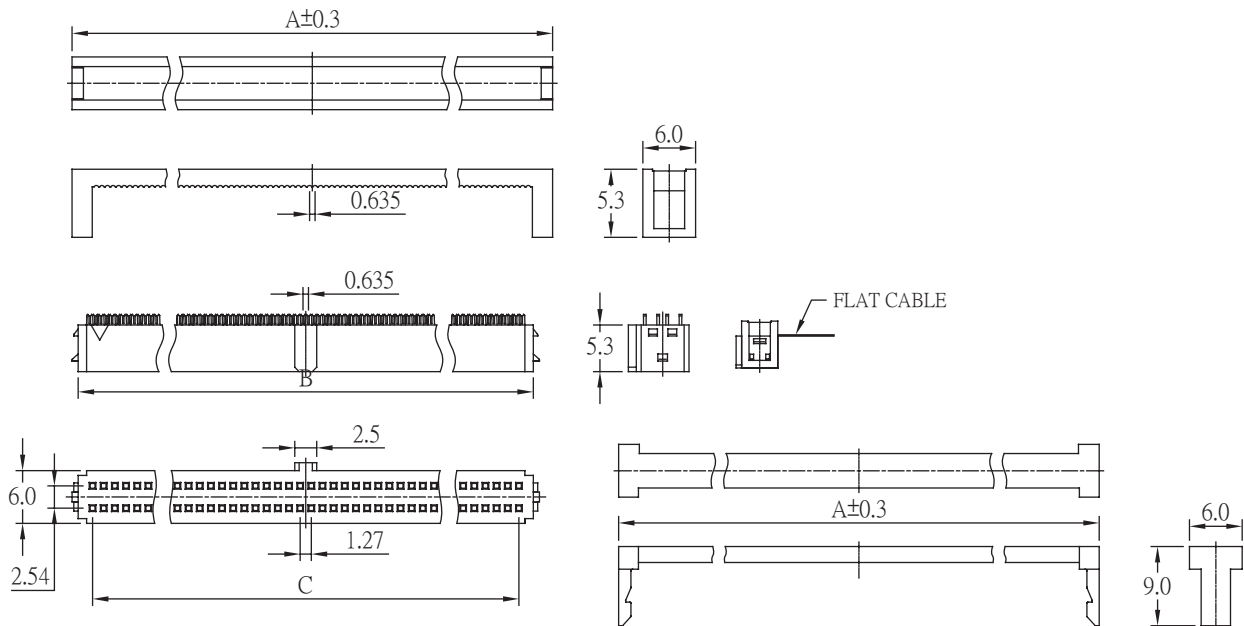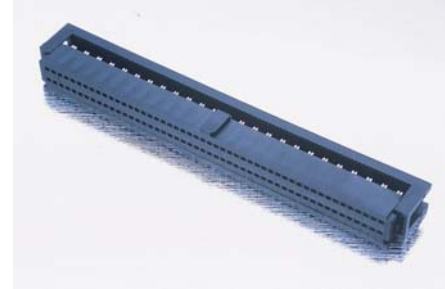

◎Mate flat cable 0.635 mm

Contacts	Dimensions		
	A	B	C
10	11.35	8.45	5.08
16	15.16	12.26	8.89
20	17.70	14.80	11.43
26	21.51	18.61	15.24
30	24.05	21.15	17.78
34	26.59	23.69	20.32
40	30.40	27.50	24.13
50	36.75	33.85	30.48
60	43.10	40.20	36.83
68	48.18	45.28	41.91
80	55.80	52.90	49.53
100	68.50	65.60	62.23

## ORDER INFORMATION

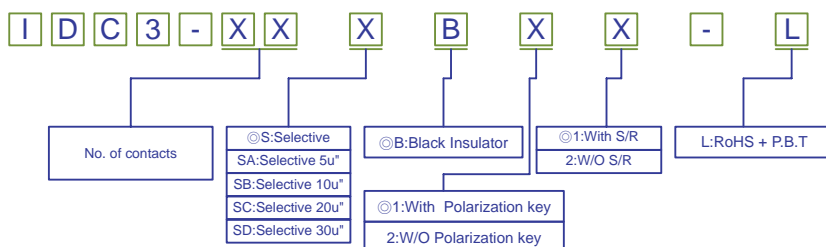

◎:Standard Recommend

RoHS Compliant