



CONNECTORS MANUFACTURE








FEMALE HEADER 2.54mm H=8.5mm WITH BUMP STRAIGHT/RIGHT ANGLE TYPE

SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Dielectric voltage:1000V AC for one minute
 Operation Temperature:-40 °C to + 105°C

MATERIAL

Insulator:Polyester,UL 94V-0
 ◎ Standard:P.B.T or Nylon 6T
 Contact Pin:Brass
 Finish:Tin, Gold Plated
 ◎Standard:Gold Flash all over

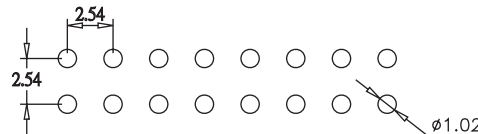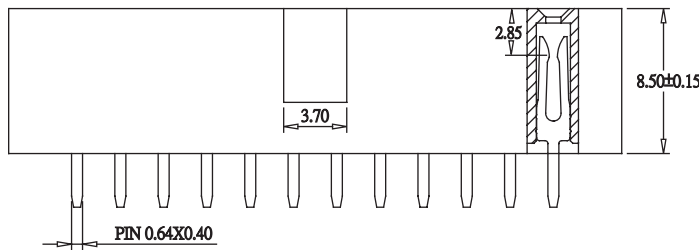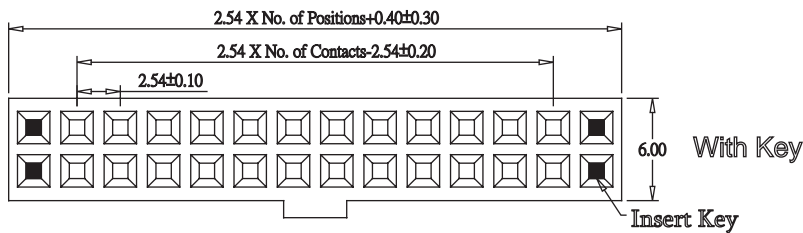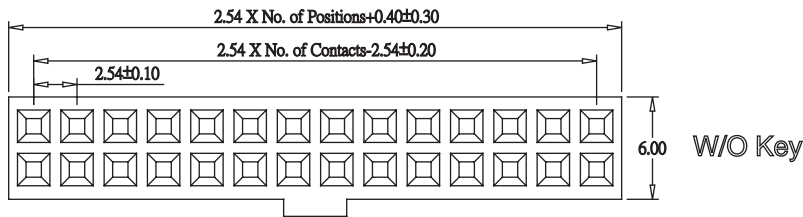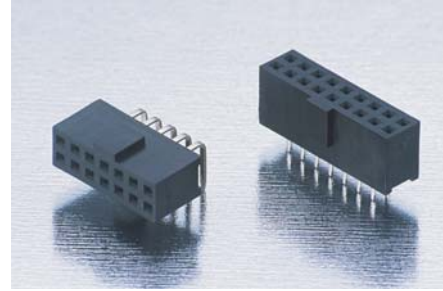


Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

FEMALE HEADER 2.54mm



ORDER INFORMATION

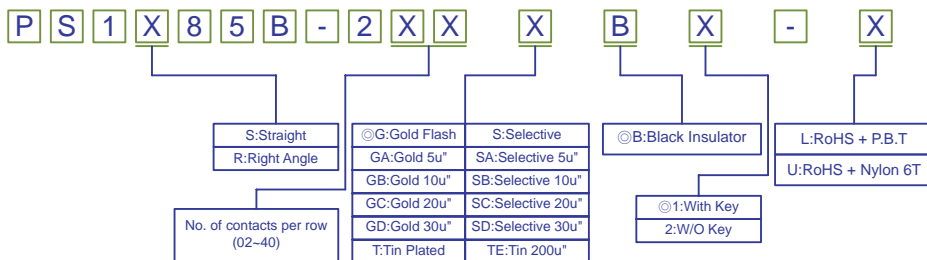

◎: Standard Recommend

AMTEK CONNECTORS MANUFACTURE