



# CONNECTORS MANUFACTURE





## FEMALE HEADER 2.54mm H=5.0mm SMT TYPE

### SPECIFICATION

Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40 °C to + 105°C


### MATERIAL

Insulator:Polyester,UL 94V-0  
 ◎ Standard:Nylon 6T  
 Contact Pin:Phospor Bronze  
 Finish:Tin, Gold Plated  
 ◎Standard:Gold Flash all over

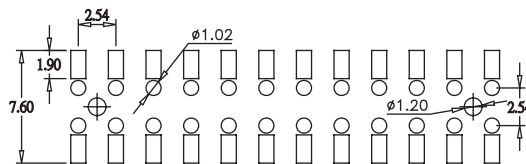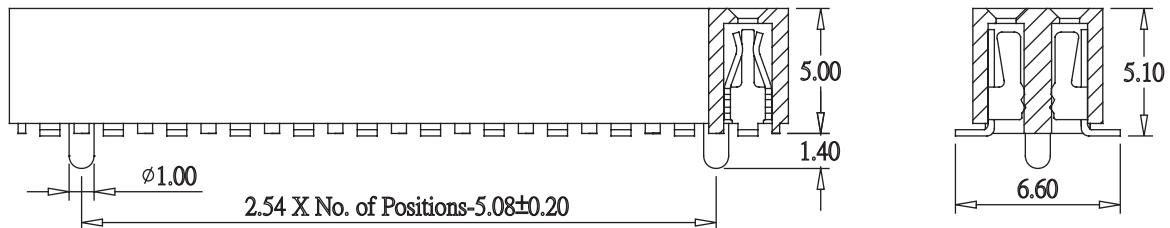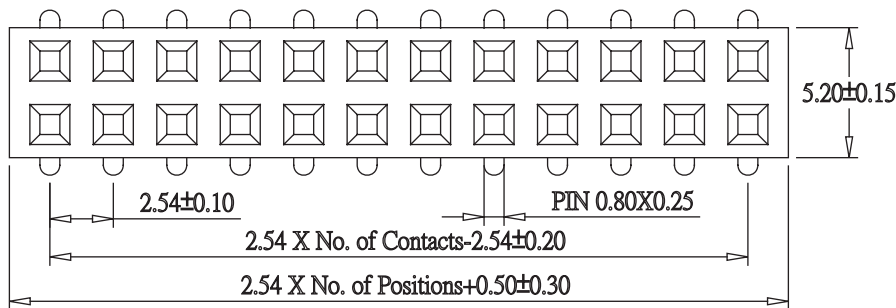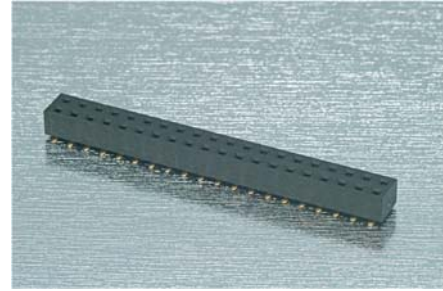

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

## ORDER INFORMATION

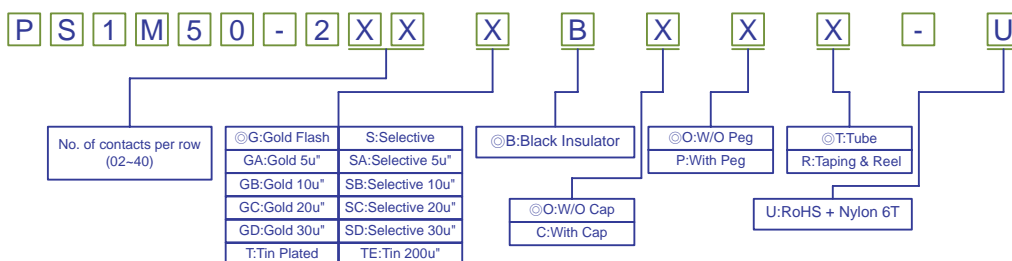

◎:Standard Recommend

